



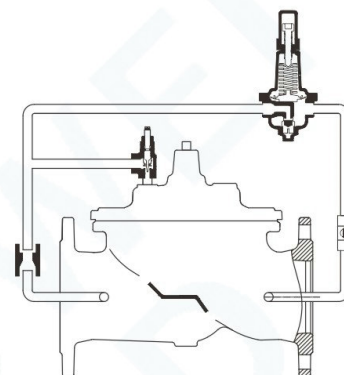

■ A200 PRESSURE REDUCING AND STABILIZING VALVE

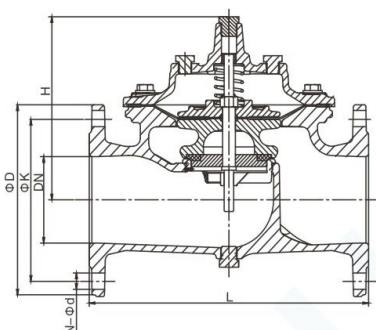

Main External and Connection Dimension

Unit: mm

DN	L	H	ΦD				ΦK				N-Φd			
			PN10	PN16	PN25	PN40	PN10	PN16	PN25	PN40	PN10	PN16	PN25	PN40
40	230	139	150				110				4-Φ19			
50	230	139	165				125				4-Φ19			
65	290	159	185				145				4-Φ19		8-Φ19	
80	310	179	200				160				8-Φ19			
100	350	214	220	235		180		190		8-Φ19		8-Φ23		
125	400	275	250	270		210		220		8-Φ19		8-Φ28		
150	480	333	285	300		240		250		8-Φ23		8-Φ28		
200	600	407	340	360	375	295		310	320	8-Φ23	12-Φ23	12-Φ28	12-Φ31	
250	730	476	405	425		350	355	370		12-Φ23	12-Φ28	12-Φ31		
300	850	526	460	485		400	410	430		12-Φ23	12-Φ28	16-Φ31		
350	980	580	520	555		460	470	490		16-Φ23	16-Φ28	16-Φ34		

Main External and Connection Dimension

Unit: mm

DN	L	H	ΦD		ΦK		N-Φd	
			PN10	PN16	PN10	PN16	PN10	PN16
400	1100	670	580		515	525	16-Φ28	16-Φ31
500	1250	790	670	715	620	650	20-Φ28	20-Φ34
600	1450	930	780	840	725	770	20-Φ31	20-Φ37

Note: This product structure length conforms to JB/T 10674 standard.

Feature

1. Reduce the high pressure at the inlet end of the pipeline to a stable set outlet pressure.
2. Distribute the main line of different pressures equally to the back end pipeline.

