
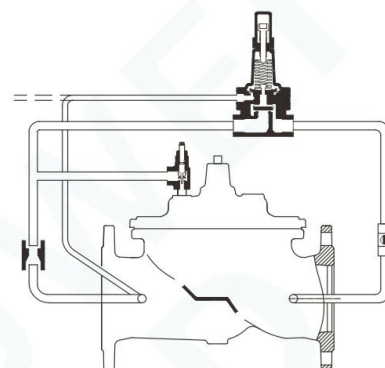


■ A500 PRESSURE RELIEF AND HOLDING VALVE

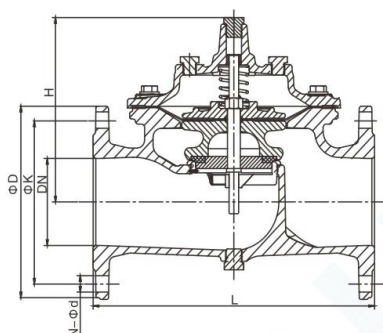

Main External and Connection Dimension

Unit: mm

DN	L	H	ΦD				ΦK				N-Φd			
			PN10	PN16	PN25	PN40	PN10	PN16	PN25	PN40	PN10	PN16	PN25	PN40
40	230	139			150				110				4-Φ19	
50	230	139			165				125				4-Φ19	
65	290	159			185				145		4-Φ19		8-Φ19	
80	310	179			200				160				8-Φ19	
100	350	214												
100	350	214	220		235		180		190		8-Φ19		8-Φ23	
125	400	275	250		270		210		220		8-Φ19		8-Φ28	
150	480	333	285		300		240		250		8-Φ23		8-Φ28	
200	600	407	340		360	375	295		310	320	8-Φ23	12-Φ23	12-Φ28	12-Φ31
250	730	476	405		425		350	355	370		12-Φ23	12-Φ28	12-Φ31	
300	850	526	460		485		400	410	430		12-Φ23	12-Φ28	16-Φ31	
350	980	580	520		555		460	470	490		16-Φ23	16-Φ28	16-Φ34	

Main External and Connection Dimension

Unit: mm

DN	L	H	ΦD		ΦK		N-Φd	
			PN10	PN16	PN10	PN16	PN10	PN16
400	1100	670		580	515	525	16-Φ28	16-Φ31
500	1250	790	670	715	620	650	20-Φ28	20-Φ34
600	1450	930	780	840	725	770	20-Φ31	20-Φ37

Note: This product structure length conforms to JB/T 10674 standard.

Feature

1. When installed in series in the pipeline, maintain the minimum set pressure of the upstream pipe network.
2. The bypass branch pipe pressure relief installation, when the pressure reaches the set value, release the excess pressure of the upstream pipeline, reduce or prevent secondary water shock.

