
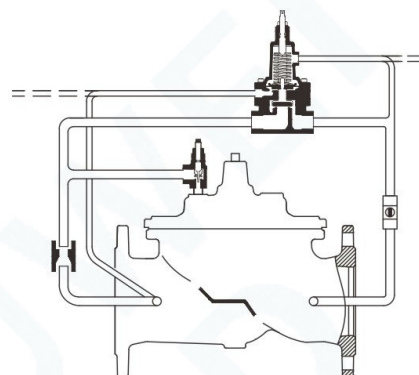


■ A800 DIFFERENTIAL PRESSURE CONTROL VALVE

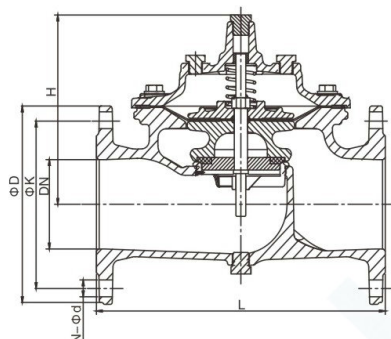

Main External and Connection Dimension

Unit: mm

DN	L	H	ΦD				ΦK				N-Φd			
			PN10	PN16	PN25	PN40	PN10	PN16	PN25	PN40	PN10	PN16	PN25	PN40
40	230	139			150				110				4-Φ19	
50	230	139			165				125				4-Φ19	
65	290	159			185				145		4-Φ19		8-Φ19	
80	310	179			200				160				8-Φ19	
100	350	214												
100	350	214	220		235		180		190		8-Φ19		8-Φ23	
125	400	275	250		270		210		220		8-Φ19		8-Φ28	
150	480	333	285		300		240		250		8-Φ23		8-Φ28	
200	600	407	340		360	375	295		310	320	8-Φ23	12-Φ23	12-Φ28	12-Φ31
250	730	476	405		425		350	355	370		12-Φ23	12-Φ28	12-Φ31	
300	850	526	460		485		400	410	430		12-Φ23	12-Φ28	16-Φ31	
350	980	580	520		555		460	470	490		16-Φ23	16-Φ28	16-Φ34	

Main External and Connection Dimension

Unit: mm

DN	L	H	ΦD		ΦK		N-Φd	
			PN10	PN16	PN10	PN16	PN10	PN16
400	1100	670		580	515	525	16-Φ28	16-Φ31
500	1250	790	670	715	620	650	20-Φ28	20-Φ34
600	1450	930	780	840	725	770	20-Φ31	20-Φ37

Note: This product structure length conforms to JB/T 10674 standard.

Feature

Control the pressure difference between any two points in the pipeline at the set value, independent of pressure changes in the pipeline and flow.

